


Specification

Code-Nr.: C171711

Photos

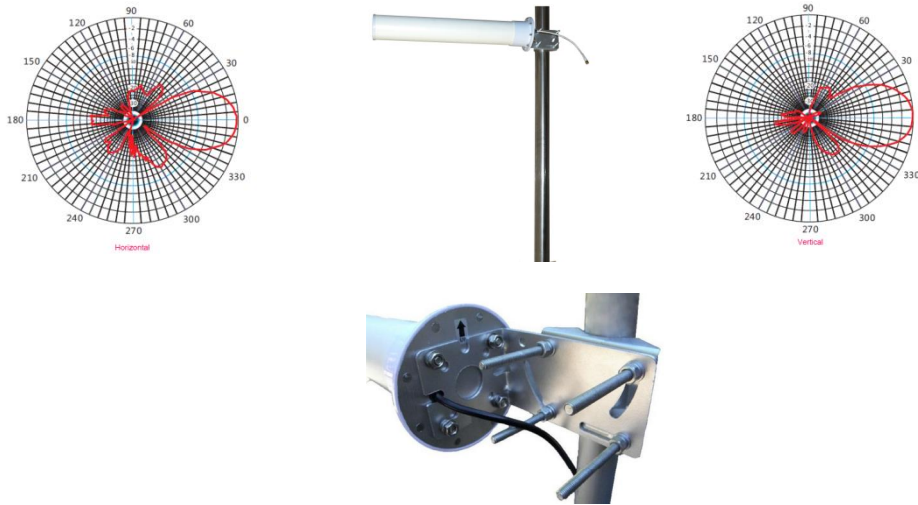

Electrical properties

Frequency	1710 - 2700 MHz
Impedance	50 Ohm
Gain	18 ± 1 dBi
Power max.	50W
Polarisation	Vertical / Horizontal
Horizontal Beam Width	32 deg
Vertical	30 deg
VSWR	< 1.5 :1
F/B	≥ 18 dB

Mechanical properties

Radome	PC and PVC
Lightning Protection	Direct Ground
Weight	1.2 kg, light weight and durable full folded dipole construction
Mount for Mast Di	30mm to 60mm
Size	520 x 110 mm
Operating Temperature Range	-40 to +70 Degrees
Storage Temperature	-50 to +75 Degrees
Cable	10m, LMR-195
Connector	SMA male (Customized)

C171711 REV. 01