

Specifications

MIMO Planar Einbauantenne LTE/WLAN


Photos

Code-Nr.: 60603142-1



Electrical properties

LTE MIMO

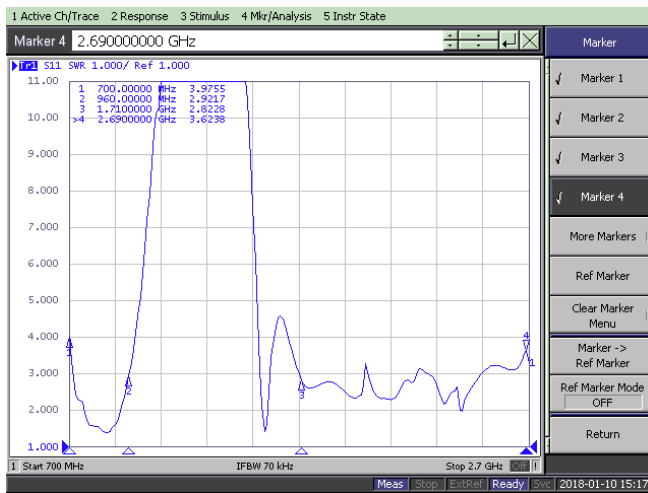

Frequency range


AMPS/GSM 850 : 824-894 MHz  
 GSM 900 : 880-960 MHz  
 GSM 1800 : 1710-1800 MHz  
 GSM 1900: 1850-1990 MHz  
 UMTS : 1920-2170 MHz  
 LTE 700 : 698-793 MHz  
 LTE 2700 : 2500-2690 MHz

Impedance  
 Polarization  
 Emission  
 Gain (dBi)

50 Ohm  
 Vertical  
 Omnidirectional  
 2 – 890 MHz  
 5 – 1710 MHz  
 5 – 2690 MHz  
 RG174 200 mm  
 SMA male

Cable  
 Connector

WLAN MIMO

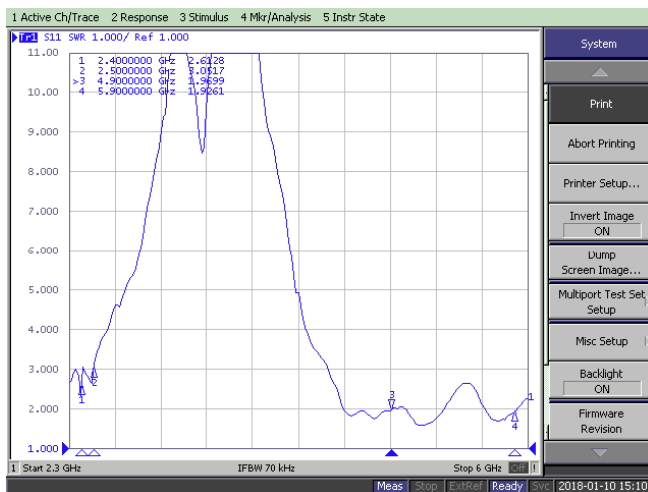

Frequency range

2400 ÷ 2485 MHz  
 5250 ÷ 5850 MHz

Impedance  
 Polarization  
 Emission  
 Gain (dBi)

50 Ohm  
 Vertical  
 Omnidirectional  
 4 – 2400 MHz  
 6 – 5800 MHz  
 RG316 200 mm  
 SMA male

Cable  
 Connector

## Mechanical properties

Material	ABS
Colour	Black
Net weight	178g
Dimensions	Ø 120mm, h=built-in ca. 62mm
Mounting hole	Ø 16mm
Temperature	-40°C - +80°C

60603142-1 / MIMO