


Specifications **MIMO Planar Einbauantenne LTE/WLAN**

Photos **Code-Nr.: 60603142-1**




Electrical properties

LTE MIMO

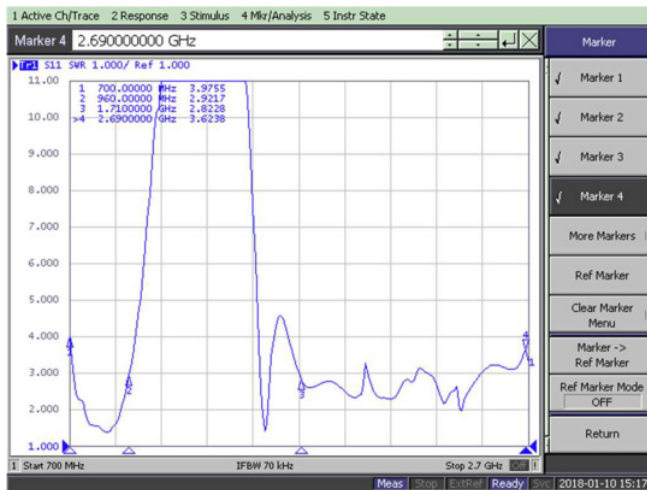

Frequency range	AMPS/GSM 850: 824–894 MHz GSM 900: 880–960 MHz GSM 1800: 1710–1800 MHz GSM 1900: 1850–1990 MHz UMTS: 1920–2170 MHz LTE 700: 698–793 MHz LTE 2700: 2500–2690 MHz
Impedance	50 Ohm
Polarization	vertical
Emission	omnidirectional
Gain (dBi)	2 – 890 MHz 5 – 1710 MHz 5 – 2690 MHz
Cable	RG174, 200 mm
Connector	SMA male

WLAN MIMO

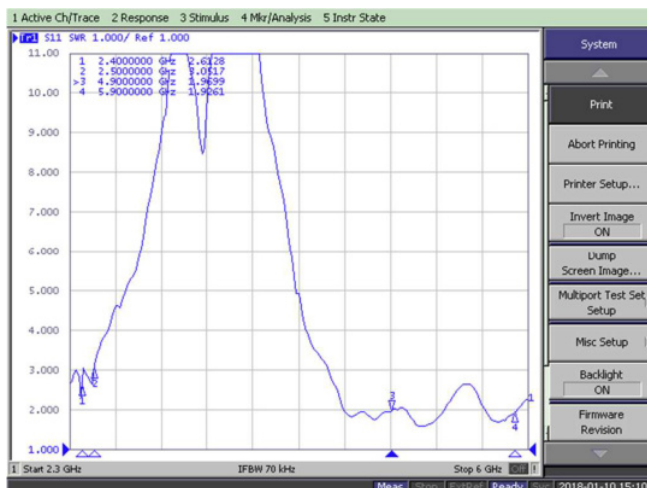

Frequency range	2400 ÷ 2485 MHz 5250 ÷ 5850 MHz
Impedance	50 Ohm
Polarization	vertical
Emission	omnidirectional
Gain (dBi)	4 – 2400 MHz 6 – 5800 MHz
Cable	RG316, 200 mm
Connector	SMA male

Mechanical properties

Material	ABS
Colour	Black
Net weight	178g
Dimensions	Ø 120mm, h=built-in ca. 62mm
Mounting hole	Ø 16mm
Temperature	-40°C - +80°C

60603142-1 / MIMO