

Specifications

MIMO Planar Einbauantenne LTE


Photos

Code-Nr.: 606031423



Electrical properties

LTE MIMO

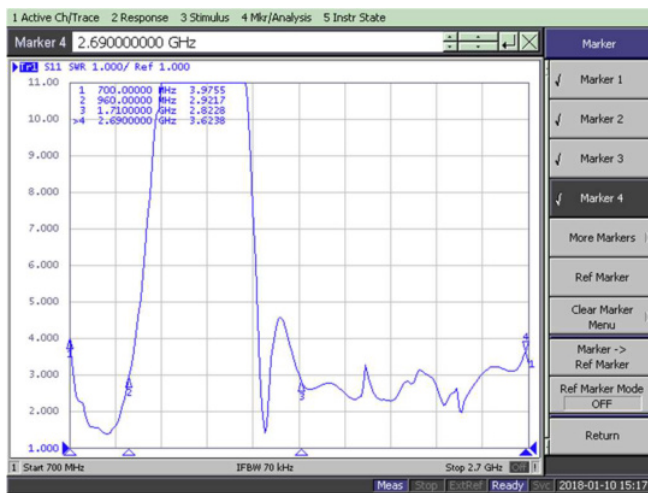

Frequency range

AMPS/GSM 850: 824–894 MHz  
 GSM 900: 880–960 MHz  
 GSM 1800: 1710–1800 MHz  
 GSM 1900: 1850–1990 MHz  
 UMTS: 1920–2170 MHz  
 LTE 700: 698–793 MHz  
 LTE 2700: 2500–2690 MHz

Impedance

50 Ohm

Polarization

vertical

Emission

omnidirectional

Gain (dBi)

2 – 890 MHz

5 – 1710 MHz

5 – 2690 MHz

Cable

RG174, 150 mm

Connector

SMA male

Mechanical properties

Material	ABS
Colour	black
Net weight	202 g
Dimensions	Ø 120mm, h=built-in ca. 62mm
Mounting hole	Ø 16mm
Temperature	-40°C – +80°C